


Fender

MTG TUBE TREMOLO

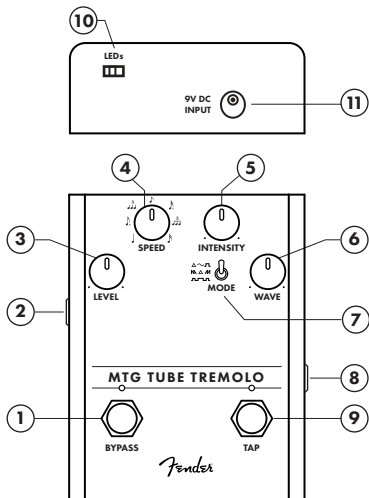

-
- | | |
|---------------------------------|-------------------------------|
| 1. Bypass Footswitch/LED | 7. Mode Switch |
| 2. Output Jack | 8. Input Jack |
| 3. Level | 9. Tap Footswitch/LED |
| 4. Speed | 10. LED Kill Switch |
| 5. Intensity | 11. DC Power Connector |
| 6. Wave | |

Fender®

MTG TUBE TREMOLO

Thanks for purchasing the MTG Tube Tremolo—a versatile analog tremolo that uses a real NOS 6205 preamp tube and features three different selectable waveform modes and a tap tempo control. Its “Wave” control enables smooth shifting among different sets of waveform modes, transitioning smoothly between sine, square, saw and ramp tremolo types. The MTG Tube Tremolo also features “Intensity” and “Level” controls. Rate can be set using the “Speed” control or the secondary Tap footswitch.

DESIGNED IN CALIFORNIA, U.S.A.

Bypass Footswitch/LED

Bypasses effect.

Output Jack

Low-impedance output jack connects to amp or to next effect pedal in signal chain.

Level

Controls overall output level.

Speed

Controls overall tremolo rate (0.1 Hz - 10 Hz).

To select various rhythmic subdivisions, press and hold Tap Footswitch while turning Speed control knob. See Tap Footswitch for more details.

Intensity

Controls how much tremolo effect is present.

Wave

Once a tremolo mode is selected using the Mode Switch (below), use this control to smoothly blend between different waveforms of each mode rather than having to choose only one.

Mode Switch

Select one of three tremolo modes—triangle/sine/square, ramp/triangle/sawtooth, and adjustable square wave.

Input Jack

High-impedance input suitable for electric guitar, bass, acoustic guitars with pickup systems, keyboards and other instruments.

Tap Footswitch/LED

Set tremolo speed by tapping two or more times at desired rate. LED flashes in sync with the waveform. Also, press and hold while turning Speed control to select specific beat subdivisions at current tempo (clockwise from full left):

- Quarter note
- Dotted eighth note
- Quarter note triplet
- Eighth note
- Dotted sixteenth note
- Eighth note triplet
- Sixteenth note

DC Power Connector

Standard center-negative 9VDC jack for use with appropriate power supplies.

LED Kill Switch

Deactivates control-knob illumination.

A PRODUCT OF
FENDER MUSICAL INSTRUMENTS CORPORATION
CORONA, CALIFORNIA, U.S.A.

Fender® is a registered trademark of FMIC.

Copyright © 2020 FMIC. All rights reserved.

PN 7719024000 REV 3

Important Safety Instructions

- **WARNING:** To prevent damage, fire or shock hazard, do not expose the unit or its AC power to rain or moisture.
- Do not alter the AC plug of the connected power adapter
- Do not drip or splash liquids on the unit.
- No user serviceable parts inside, refer servicing to qualified personnel only.
- **WARNING:** The unit must only be connected to a safety agency certified, regulated, power source (adapter), approved for use and compliant with applicable local and national regulatory safety requirements.
- Unplug the AC power adapter before cleaning the unit exterior. Use only a damp cloth for cleaning and then wait until the unit is completely dry before reconnecting it to power.
- Amplifiers and loudspeaker systems, and ear/headphones (if equipped) are capable of producing very high sound pressure levels which may cause temporary or permanent hearing damage. Use care when setting and adjusting volume levels during use.

THIS DEVICE COMPLIES WITH PART 15 OF FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

Additional Languages

Manual available in additional languages at
www.fender.com/support

Specifications

IMPEDANCES:	INPUT: 1 MΩ	OUTPUT: 470Ω
POWER SUPPLY:	9VDC regulated adapter, 5.5 x 2.1 mm barrel connector, center negative	
POWER REQUIREMENTS:	200 mA @ 9VDC +—⊖—	
DIMENSIONS:	3.75" x 4.9" x 2.5" (95.25mm x 124.5mm x 63.5mm)	
WEIGHT:	1.2lbs (.54kg)	



Product specifications subject to change without notice



Fender®

© FENDER MUSICAL INSTRUMENTS 2020

产品中有害物质的名称及含量

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
箱体	O	O	O	O	O	O
喇叭单元*	O	O	O	O	O	O
电子部分	X	O	X	O	O	O
接线端子	X	O	O	O	O	O
电线	X	O	O	O	O	O
附件	O	O	O	O	O	O

本表格依据 SJ/T 11364 的规定编制。

O: 表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。

X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。

注: 含有有害物质的部件由于全球技术发展水平限制而无法实现有害物质的替代。

*产品含有喇叭单元时有效。