

ENGINE ROOM™ LVL 12

Fender®


OWNER'S MANUAL

ENGINE ROOM™ LVL 12



Thanks for purchasing an Engine Room LVL 12 power supply. Energize your effects chain with this top-line Engine Room model, stylishly designed for premium power and maximum performance and convenience — with 12 ground-isolated outputs (two of which feature selectable voltage), USB-A and USB-C outputs for smart devices, and more. When it's time to organize your effects like a pro neatly and efficiently, head for the Engine Room.

FRONT

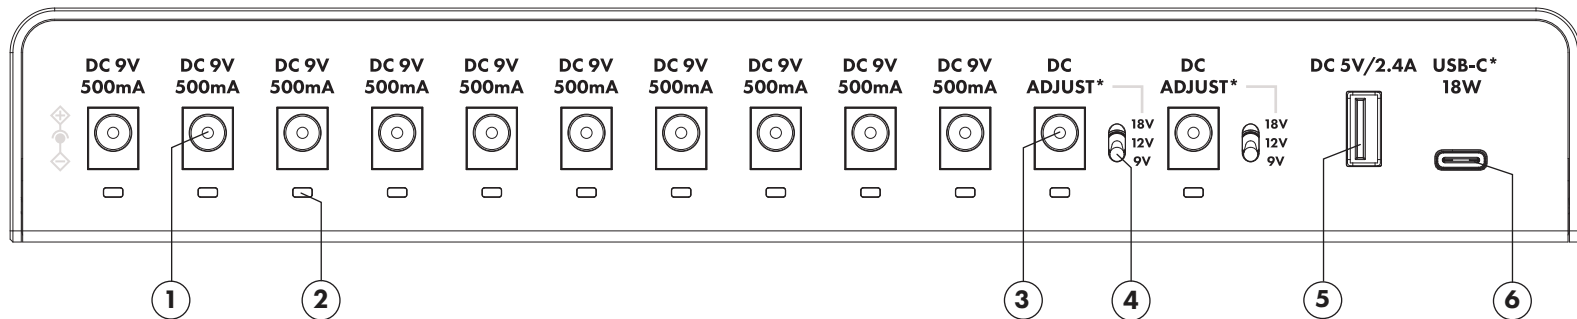

1. Ground Isolated Output (Fixed)

Ten 9VDC at 500mA fixed isolated output.

2. Output Status LED

Two-color current output status LED. Green indicates current within specifications, red indicates current overload.

3. Selectable-Voltage Output

Two isolated outputs with selectable voltage (9V/12V/18V) using three-way toggle switch.

4. Selectable-Voltage Output Switch

Two three-way toggle switches; one for each selectable-voltage output (9V/12V/18V).

5. USB-A Output

USB-A output for charging smart devices.

6. USB-C Output

USB-C output for charging smart devices.

REAR



7. IEC Power Output

For “daisy-chaining” with another compatible device using included 12” male/female IEC cable.

8. IEC Power Inlet

100V-240V mains inlet voltage, for use anywhere in the world.

ENGINE ROOM™ LVL 12 CABLE/ACCESSORY KIT

The Engine Room LVL 12 Power Supply comes with a cable/accessory kit containing an assortment of cables, including:

- 6 X 24" (60cm) cable, 2.1 mm barrel connector
- 4 X 18" (45cm) cable, 2.1 mm barrel connector
- 2 X 12" (30cm) cable, 2.1 mm barrel connector
- 18" (45cm) cable, 2.5mm-2.1 mm barrel connector (green)
- 18" (45cm) cable, 2.5mm-2.1 mm barrel connector, reverse polarity (red)
- 18" (45cm) cable, 3.5mm TS-2.1 mm barrel connector
- 18" (45cm) cable, 9V battery clip-2.1 mm barrel connector
- 12" (30cm) IEC male-female daisy-chain cable
- 78.7" (2m) IEC power cable
- Four rubber feet with adhesive

SPECIFICATIONS

TYPE	PR5897
FIXED OUTPUTS	9V 500mA
ADJUSTABLE OUTPUTS	9V 500mA, 12V 375mA, 18V 250mA
USB CHARGING OUTPTS	USB-A: 12W USB-C: 18W
DIMENSIONS	Width: 11.1" (282mm) Height: 1.65" (42mm) Depth: 3.66" (93mm)
WEIGHT	1.84 lbs. (835g)



Product specifications subject to change without notice.



NOTES

A PRODUCT OF
FENDER MUSICAL INSTRUMENTS CORPORATION
CORONA, CALIF. U.S.A.

Fender® is a registered trademark of FMIC.
Copyright © 2021 FMIC. All right reserved.

PN 7720281000 REV. A

Manual available in other languages at
www.fender.com/support

产品中有害物质的名称及含量

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
箱体	O	O	O	O	O	O
喇叭单元*	O	O	O	O	O	O
电子部分	X	O	X	O	O	O
接线端子	X	O	O	O	O	O
电线	X	O	O	O	O	O
附件	O	O	O	O	O	O
本表格依据 SJ/T 11364 的规定编制。 O：表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。 X：表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。 注：含有有害物质的部件由于全球技术发展水平限制而无法实现有害物质的替代。						

*产品含有喇叭单元时有效。