


Fender[®]

HAMMERTONE™

FUZZ

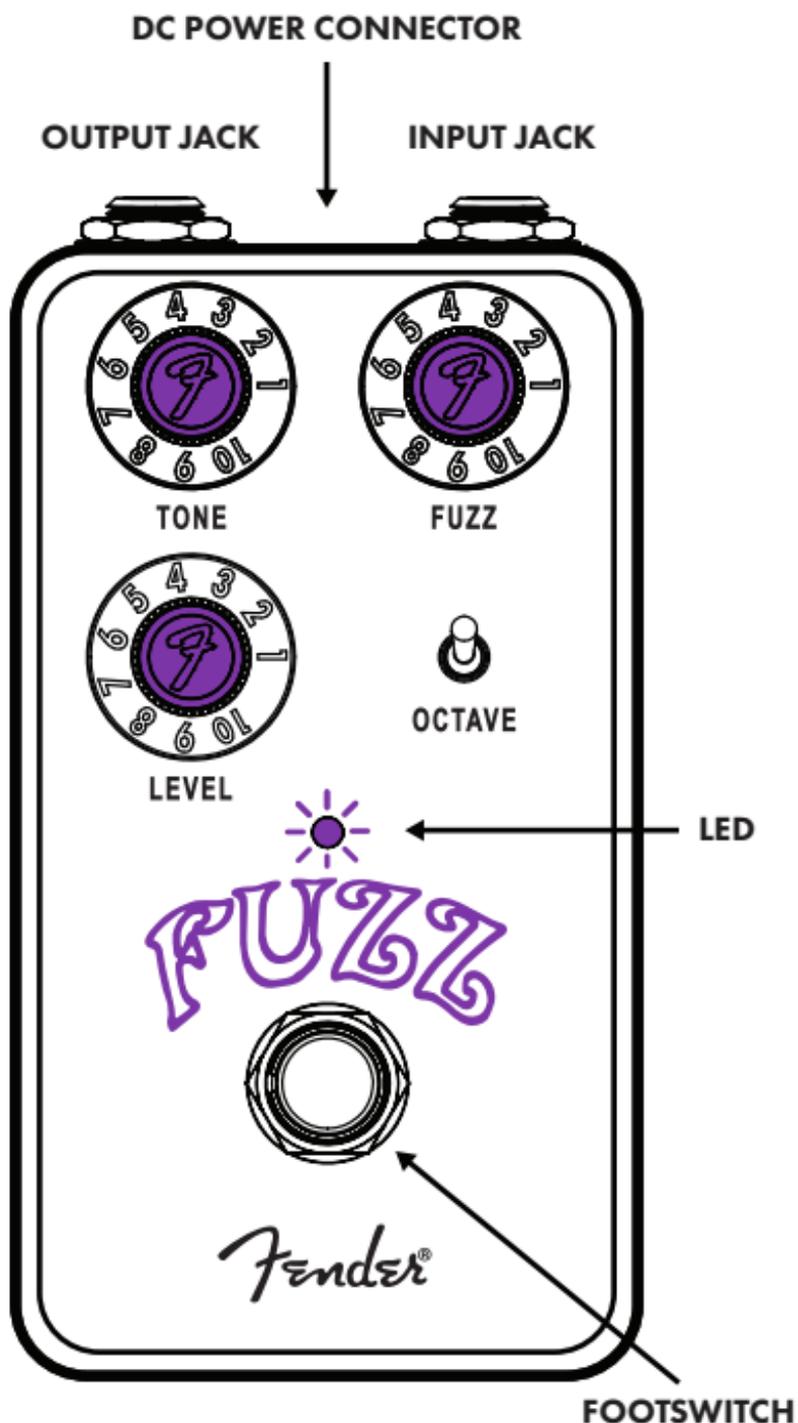

9V BATTERY SCREW ACCESS ON REAR

Fender®

HAMMERTONE FUZZ

Thanks for purchasing the Hammertone Fuzz—a classic stompbox effect that drives your sound to new heights of gritty satisfaction.

Dial in all the fuzz desired with tone, fuzz, gain and level controls, and use the internal trim potentiometer to tailor the tonal breakup even more. Fuzz is an perennially cool effect in the arsenal of any guitarist and bassist, and the Hammertone Fuzz puts the buzz at your feet in every shade from slight to super.

OUTPUT JACK

Low-impedance output connects to amp or next pedal in signal chain.

INPUT JACK

High-impedance input for electric guitar, bass, acoustic guitars with pickup systems, keyboards and other instruments.

DC POWER CONNECTOR

Connect DC adapter here. Standard center-negative 9VDC jack for use with appropriate power supplies.

tone control knob

Adjusts balance between treble and bass frequencies.

FUZZ CONTROL KNOB

Adjusts amount of fuzz.

LEVEL CONTROL KNOB

Adjusts output volume of effect.

OCTAVE SWITCH

Adds octave-up fuzz mode, providing more volume and cut.

LED

Illuminates when effect is on.

FOOTSWITCH

Turns effect on and off.


BATTERY COMPARTMENT (REAR)

Screw-access compartment houses one 9V battery.

INTERNAL TRIM POTENTIOMETER (ACCESSIBLE BY REMOVING COVER)

TONE 2 trim pot adjusts high-frequency character.

Remove cover using a flat-head screwdriver. Adjust trim pot using a Phillips-head screwdriver.

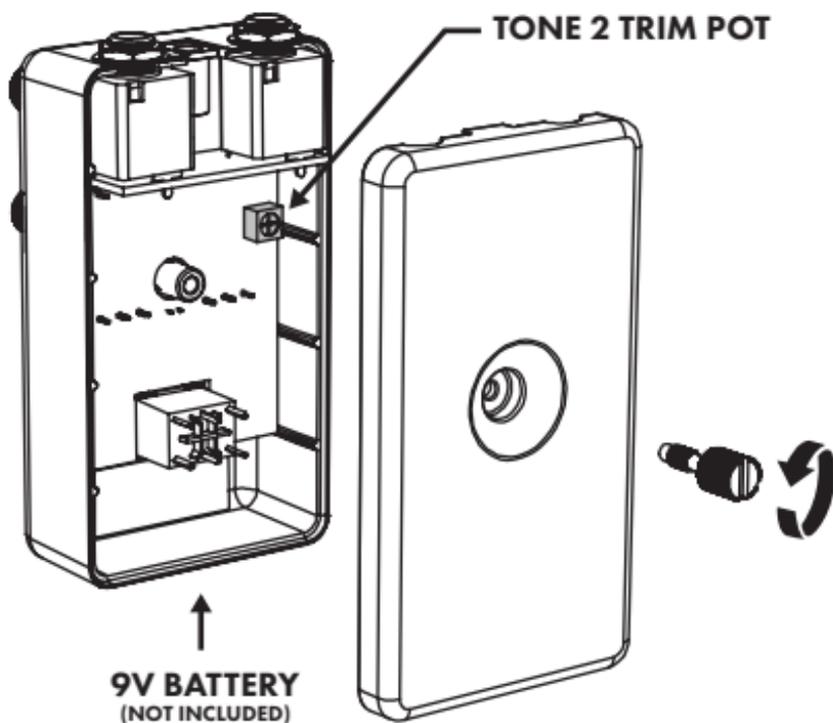

A PRODUCT OF
FENDER MUSICAL INSTRUMENTS CORPORATION
CORONA, CALIFORNIA, U.S.A.

Fender® is a registered trademark of FMIC.

Copyright © 2021 FMIC. All rights reserved.

PN 7724432000 REV B

IMPORTANT SAFETY INSTRUCTIONS

- **WARNING:** To prevent damage, fire or shock hazard, do not expose the unit or its AC power to rain or moisture.
- Do not alter the AC plug of the connected power adapter
- Do not drip or splash liquids on the unit.
- No user serviceable parts inside, refer servicing to qualified personnel only.
- **WARNING:** The unit must only be connected to a safety agency certified, regulated, power source (adapter), approved for use and compliant with applicable local and national regulatory safety requirements.
- Unplug the AC power adapter before cleaning the unit exterior. Use only a damp cloth for cleaning and then wait until the unit is completely dry before reconnecting it to power.
- Amplifiers and loudspeaker systems, and ear/headphones (if equipped) are capable of producing very high sound pressure levels which may cause temporary or permanent hearing damage. Use care when setting and adjusting volume levels during use.

ADDITIONAL LANGUAGES

Manual available in additional languages at
www.fender.com/support

SPECIFICATIONS

IMPEDANCES POWER SUPPLY

Input: 500kΩ Output: 5kΩ (max)
80mA min @ 9VDC regulated adapter 
5.5 x 2.1 mm barrel connector (not included)
or 9V alkaline battery (not included)

POWER REQUIREMENTS DIMENSIONS

9VDC
2.44" x 4.4" x 2.2" (62mm x 111.8mm x 55.9mm)

WEIGHT

0.55 lbs (0.25kg)



Product specifications subject to change without notice



Fender®

© FENDER MUSICAL INSTRUMENTS 2021

产品中有害物质的名称及含量

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
箱体	O	O	O	O	O	O
喇叭单元*	O	O	O	O	O	O
电子部分	X	O	X	O	O	O
接线端子	X	O	O	O	O	O
电线	X	O	O	O	O	O
附件	O	O	O	O	O	O

本表格依据 SJ/T 11364 的规定编制。

O: 表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。

X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。

注: 含有有害物质的部件由于全球技术发展水平限制而无法实现有害物质的替代。

*产品含有喇叭单元时有效。