Fender®

HAMMERTONE®

BOOST

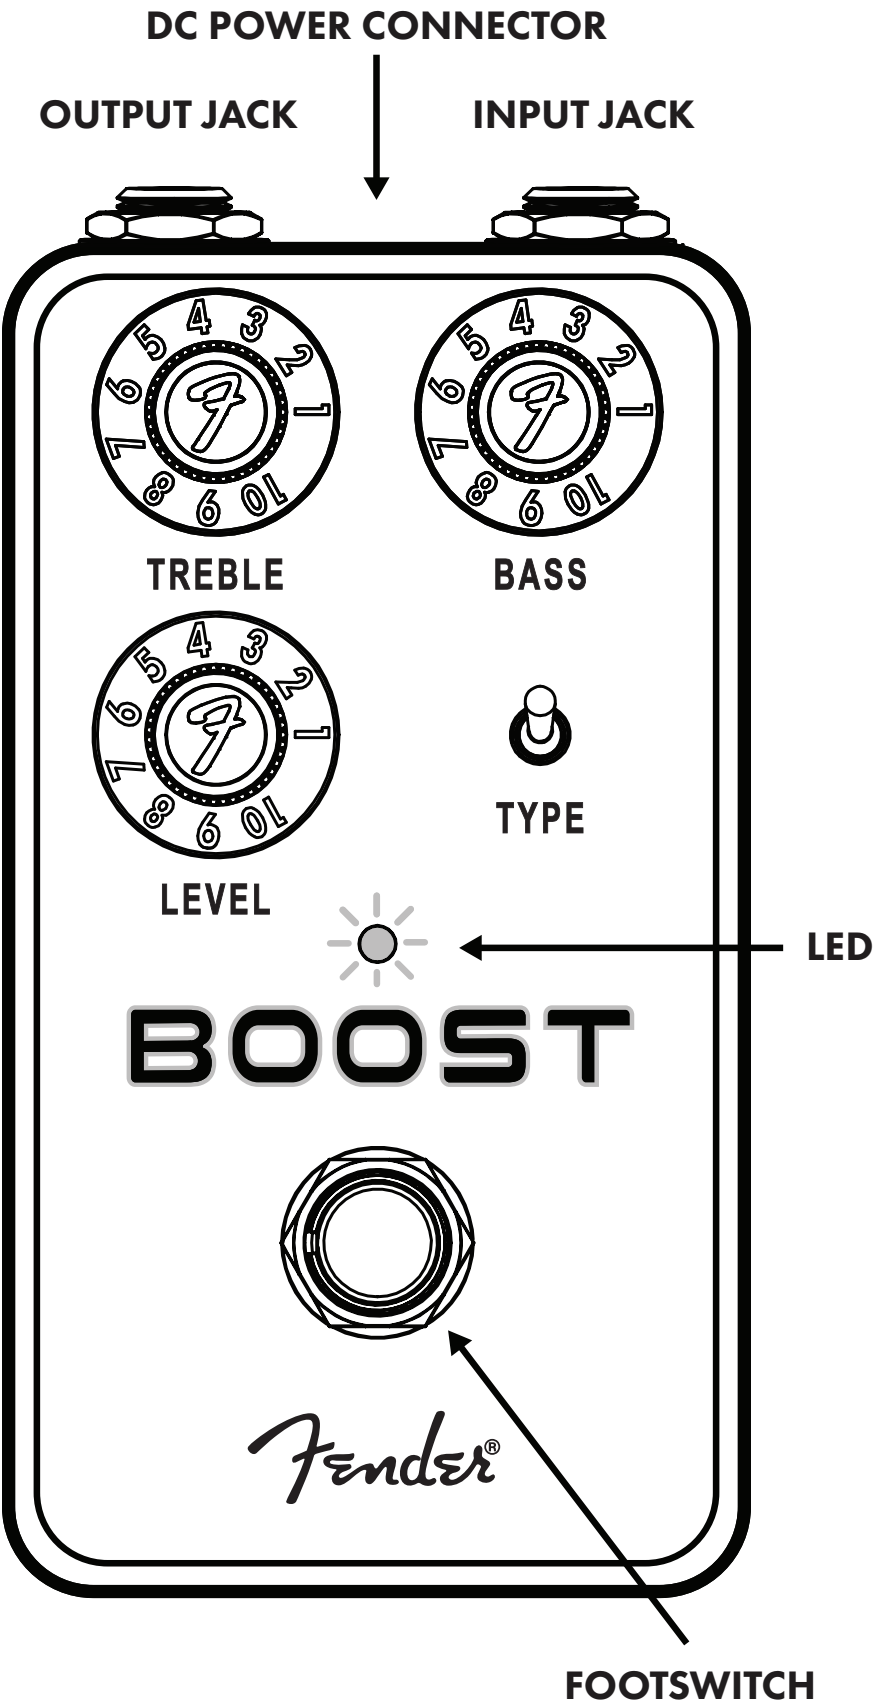

9V BATTERY SCREW ACCESS ON REAR

HAMMERTONE BOOST

The Hammertone Boost pushes your signal to new levels with two distinct flavors of boost in one enclosure and up to 20dB of volume boost on tap.

Select between a pristine, clean opamp boost circuit to increase volume without introducing tonal color, or a JFET-based circuit to fatten your tone with a taste of harmonically rich compression characteristic of preamps found in vintage tape units. Easily attain a completely flat boost thanks to the center detents on the Treble and Bass controls or adjust each knob to boost or cut frequencies any way you like.

OUTPUT JACK
Low-impedance output connects to amp or next pedal in signal chain.

INPUT JACK
High-impedance input for electric guitar, bass, acoustic guitars with pickup systems, keyboards and other instruments.

DC POWER CONNECTOR
Connect DC adapter here. Standard center-negative jack for use with appropriate power supplies. Accepts 9V-18VDC. Higher voltage provides 6dB of additional headroom.

TREBLE CONTROL KNOB
Center detent marks flat EQ. Turn clockwise to boost treble frequencies and counterclockwise to cut treble frequencies.

BASS CONTROL KNOB
Center detent marks flat EQ. Turn clockwise to boost bass frequencies and counterclockwise to cut bass frequencies.

LEVEL CONTROL KNOB
Adjusts output signal volume. Unity gain at minimum. Provides up to 20dB of boost.

TYPE SWITCH
Selects between two boost circuits. DOWN position selects a JFET-based circuit that fattens the signal with harmonically rich compression as the level is turned up; UP position selects an opamp circuit designed for powerful clean boost with as little tonal coloration as possible.

BYPASS FOOTSWITCH/LED
Footswitch turns effect on and off using relay true bypass. LED Illuminates when effect is on.

BATTERY COMPARTMENT (REAR)
Screw-access compartment houses 9V battery.

BATTERY COMPARTMENT

Remove cover using a flat-head screwdriver.

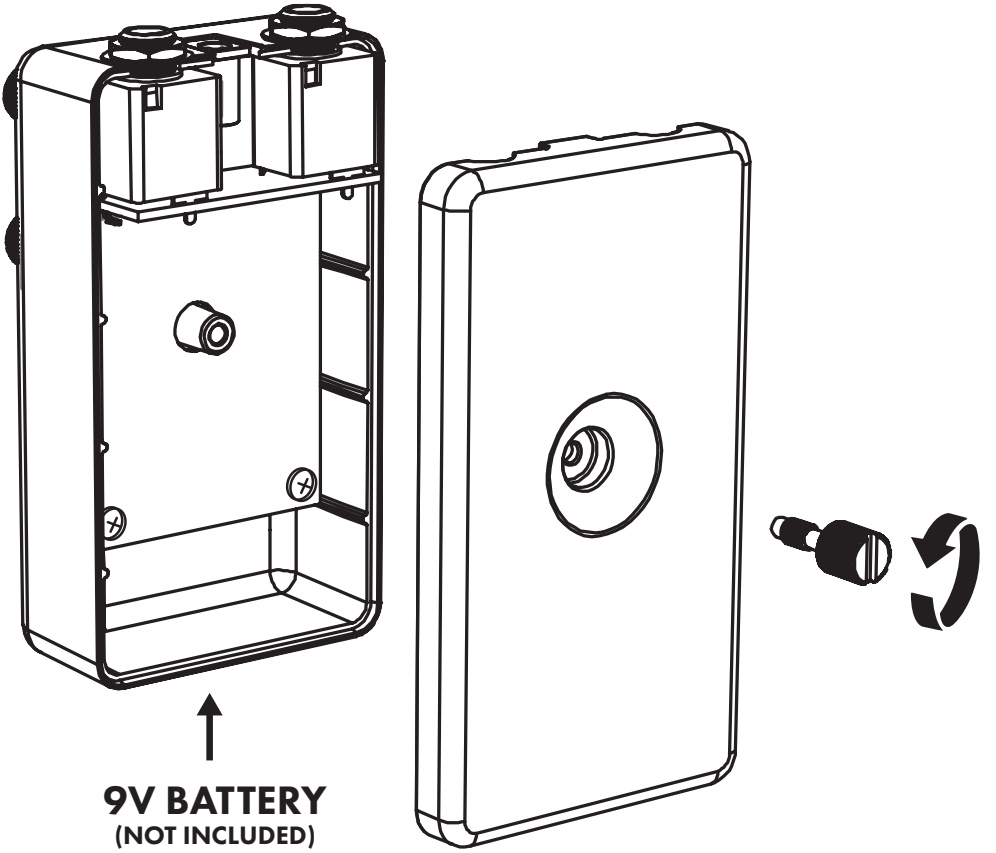

A PRODUCT OF
FENDER MUSICAL INSTRUMENTS CORPORATION
311 CESSNA CIRCLE
CORONA, CALIFORNIA, 92878 U.S.A.

Fender® and Hammertone® are registered trademarks of FMIC.

Copyright © 2025 FMIC. All rights reserved.

PN 70-82000349 REV A

IMPORTANT SAFETY INSTRUCTIONS

- WARNING: To prevent damage, fire or shock hazard, do not expose the unit or its AC power to rain or moisture.
- Do not alter the AC plug of the connected power adapter.
- Do not drip or splash liquids on the unit.
- No user serviceable parts inside, refer servicing to qualified personnel only.
- WARNING: The unit must only be connected to a safety agency certified, regulated, power source (adapter), approved for use and compliant with applicable local and national regulatory safety requirements.
- Unplug the AC power adapter before cleaning the unit exterior. Use only a damp cloth for cleaning and then wait until the unit is completely dry before reconnecting it to power.
- Amplifiers and loudspeaker systems, and ear/headphones (if equipped) are capable of producing very high sound pressure levels which may cause temporary or permanent hearing damage. Use care when setting and adjusting volume levels during use.

ADDITIONAL LANGUAGES

Manual available in additional languages at
www.fender.com/support

SPECIFICATIONS

IMPEDANCES	Input: 1MΩ Output: 470Ω
POWER SUPPLY	85mA min @ 9V-18VDC regulated adapter + - 5.5 x 2.1 mm barrel connector (not included)
POWER REQUIREMENTS	9V-18VDC
DIMENSIONS	2.44" x 4.4" x 2.2" (62mm x 111.8mm x 55.9mm)
WEIGHT	0.50 lbs (0.23kg)

Product specifications subject to change without notice

© FENDER MUSICAL INSTRUMENTS 2025

产品中有害物质的名称及含量

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
箱体	O	O	O	O	O	O
喇叭单元*	O	O	O	O	O	O
电子部分	X	O	X	O	O	O
接线端子	X	O	O	O	O	O
电线	X	O	O	O	O	O
附件	O	O	O	O	O	O

本表格依据 SJ/T 11364 的规定编制。
O： 表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。
X： 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。
注： 含有有害物质的部件由于全球技术发展水平限制而无法实现有害物质的替代。

*产品含有喇叭单元时有效。