


PARTS LAYOUT

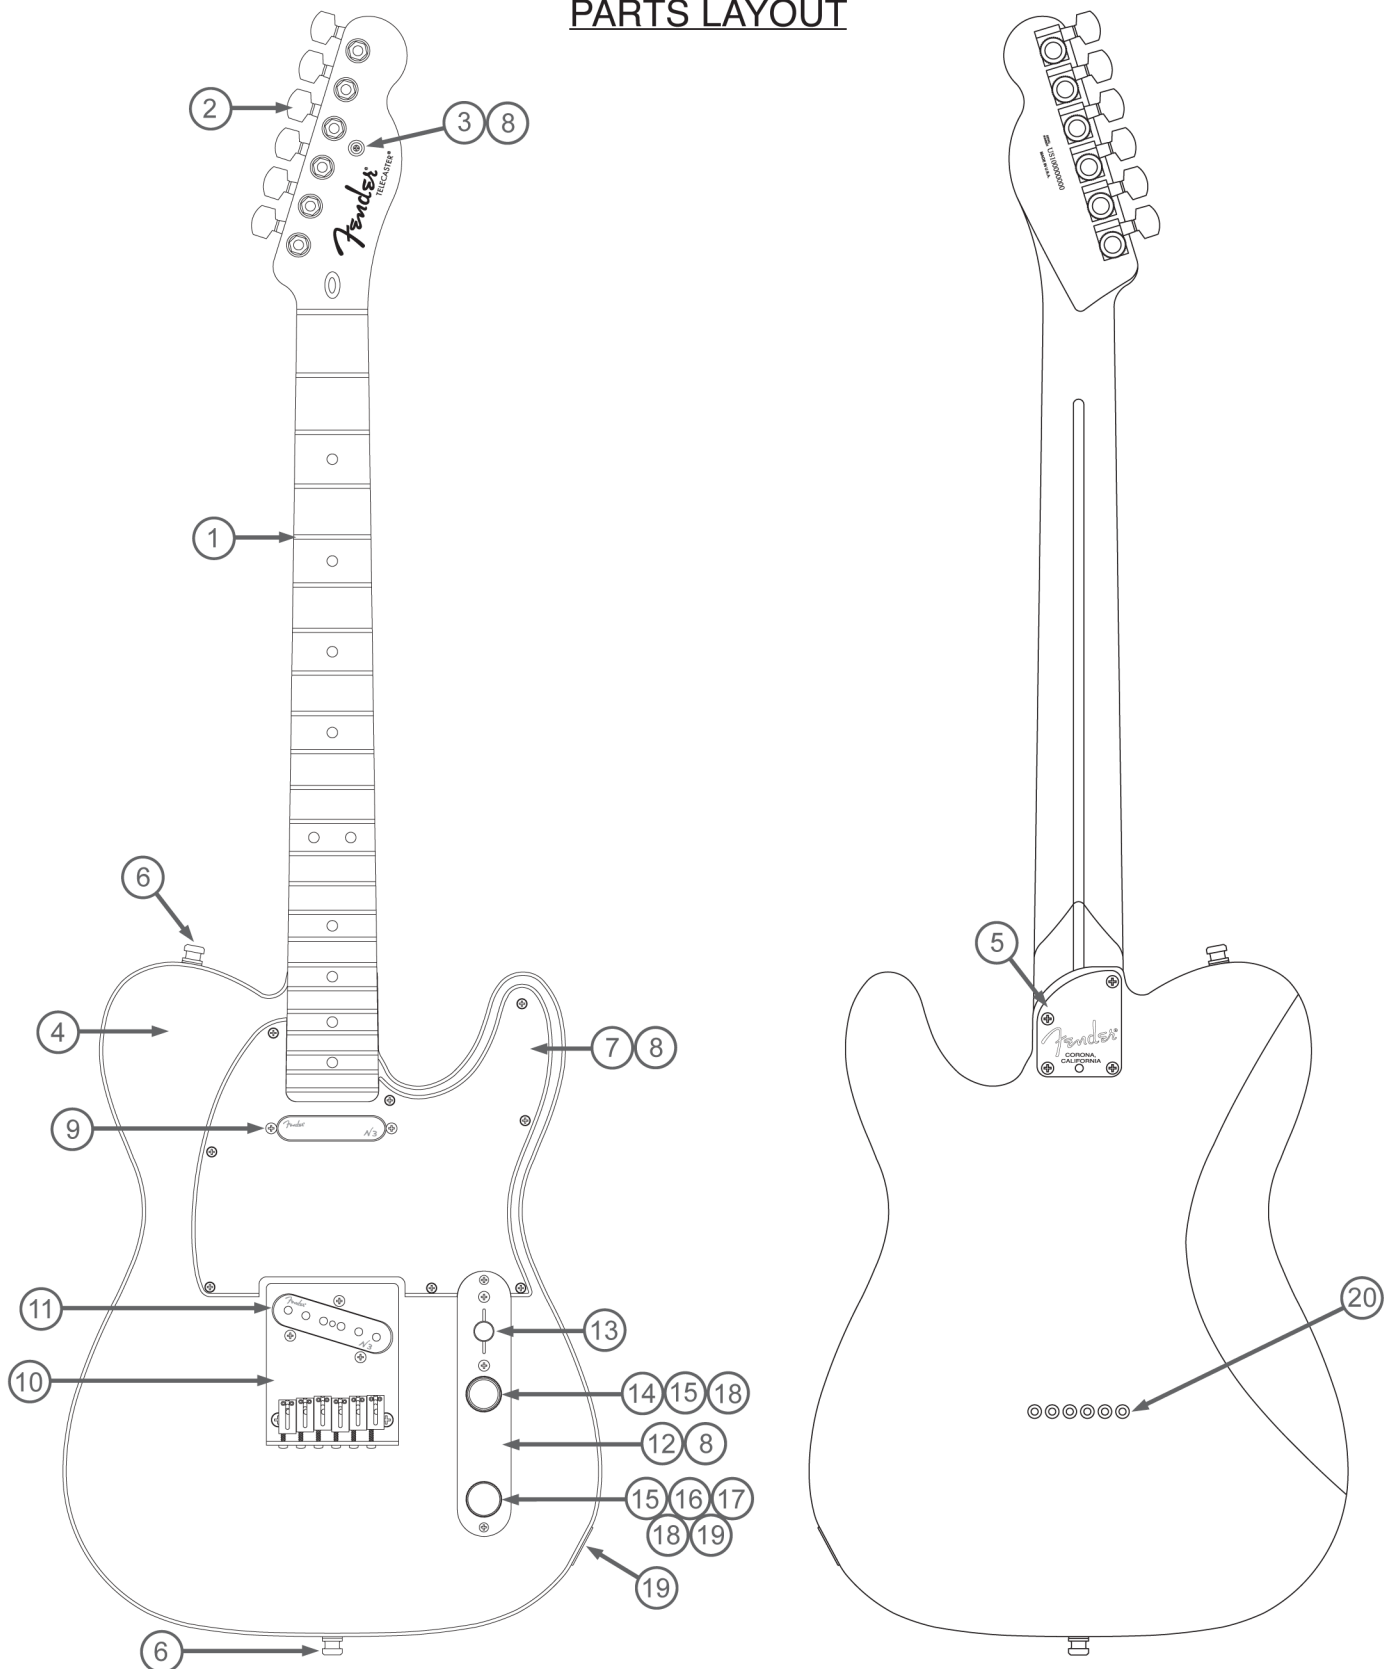


Fender® AMERICAN DELUXE TELE® (011-9400/9402-7XX)

PARTS LIST

REF#	DESCRIPTION	PART NUMBER
1	NECK AM DLX TELE MPL UPGRD	0077686000
1	NECK AM DLX TELE RW UPGRD	0077685000
2	FENDER LOCKING TUNERS, CHROME	0990818100
2	WASHER KEY PING (6)	0053106049
2	BUSHING KEYS PING	0053107000
3	STRING GUIDE VINT/DLX TELE CHR KAN BAN	0054625000
4	BODY DLX TELE ALD/BNDG TNG	0079353559
4	BODY DLX TELE ALD/BNDG 3TS	0079354500
4	BODY DLX TELE ALD/B.SHELL BNDG OLP	0079355523
4	BODY DLX TELE ALD/BNDG ACS	0079354531
5	PLATE NECK DLX STRAT RH CHR KAN BAN	0059209000
5a	SCREW SM 8 X 1-3/4 OH CHR (12)	0021424049
5b	SCREW ST 1/4-20x3/8 OP NI HEX	0031571000
6	AM SRS STRAP BUTTONS	0994914000
6a	SCREW SM 5 X 1 OH CHROME (12)	0021422049
6b	BLACK FELT WASHERS	0994929000
6c	WHITE FELT WASHERS	0994930000
7	PICKGUARD AS TELE B/W/B	0073054000
7	PG, TELE TORT SHELL 8-HOLE	0992152000
7	PICKGUARD AM STD TELE MG/BLK/MG	0056083000
7	PICKGUARD AS TELE AGED WHT PRL	0064031000
8	PICKGUARD SCREWS	0994923000
9	PICKUP ASSY, TELE NK ALN35	0078870000
9a	SCRW M 4-40x7/8 RHP ZA	0059319000
10	BRIDGE ASSY AM DLX TELE UPGRD	0077657000
10a	SCREW SMA #3x1/2 OH PHS CRH (12)	0027956049
10b	SCRW SMA 8x1 OHP ZA CHR (12)	0021373049
10c	BRIDGE PLATE AM DLX TELE RH CHROME	0077094000
10d	SADDLE CC TELE BRSS/CHRM RH CS KAN BAN	0058083000
10e	SCREW 4-40x5/8 PHP BLK (12)	0017031049
10f	SCREW SET 4-40X3/8 HX CUP BLK (12)	0018027049
10g	SCREW HEIGHT ADJ. 5/16" BLK (12)	0026780049
10h	SPRING INTONATION .115x1/2 BLK (12)	0029094049
10i	SPRING INTONATION .115x5/8 BLK (12)	0029095049
10k	SCREW M 4-40x3/4 PHP BLX (12)	0031913049
11	PICKUP ASSY, TELE BRDG ALN35	0078871000
11a	SCRW SPCL M 4-40x13/16 M5RHP NI (12)	0063396049
11b	TUBING, SIL RUB CUT RED .625	0068156000
12	ORIG VINT TELE CONTROL PLATE	0992058000
13	ORIG 3-WAY SWITCH VNT STR/TEL	0992041000
13a	ORIGINAL TELE SWITCH TIPS	0994936000
13b	PICKUP/SWITCH SCREWS	0994925000
14	SW/POT ASSY S-1 250K .25B SOSH BI TECH	0078979000
14a	SW CAP TELE/P BASS CHROME KAN BAN	0059270000
14b	COUPLING SLEEVE SOSH NYL	0059278000
14c	SW KNOB TELE/P BASS CHROME KAN BAN	0059272000
15	SET SCREWS FOR KNOBS (12)	0994922000
16	TELE/P. BASS KNOBS CHROME (2)	0991366000
17	CNTRL 250K 10% TAPER NO-LOAD SOSH B-TECH	0078782000
18	NUT HEX 3/8-32 X 1/2 NICKEL (12)	0016352049
18a	WASHER, INTLOCK 3/8 NI (12)	0016436049
19	CAP MPF RDL .022uf 250v 10% (12)	0024832049
20	JACK, PHONE OPEN W/HDWR	0021956049
20a	RETAINER JACK NI PLT (TELE) (4)	0010355069
20b	FERRULE JACK STD TELE CHROME KAN BAN	0021452000
20c	NUT HEX 3/8-32 X 1/2 NICKEL (12)	0016352049
20d	WASHER, INTLOCK 3/8 NI (12)	0016436049
21	AM SRS TELE FERRULES	0994917000
22	STRAP LEATHER DLX SRS STR/TELE*	0054138000
23	KIT, AM DLX TELE UPGRADE*	0064288001
23a	WRENCH 1/8 X 1-1/4 X 2-3/4 HEX (12)*	0023811049
23b	WRENCH .050 HEX KEY SHORT ARM (12)*	0018531049
23c	SEC. STRP LOCKS & BUTNS*	0990690000
23d	CABLE OUTPUT GUITAR BLK 10 FT*	0027174000
23e	MANUAL, OWNERS, GTR AND BASS*	0037723000
24	CASE, MOLDED STRAT/TELE SKB*	0996101506


* = NOT PICTURED IN DIAGRAM

WIRING ASSEMBLY

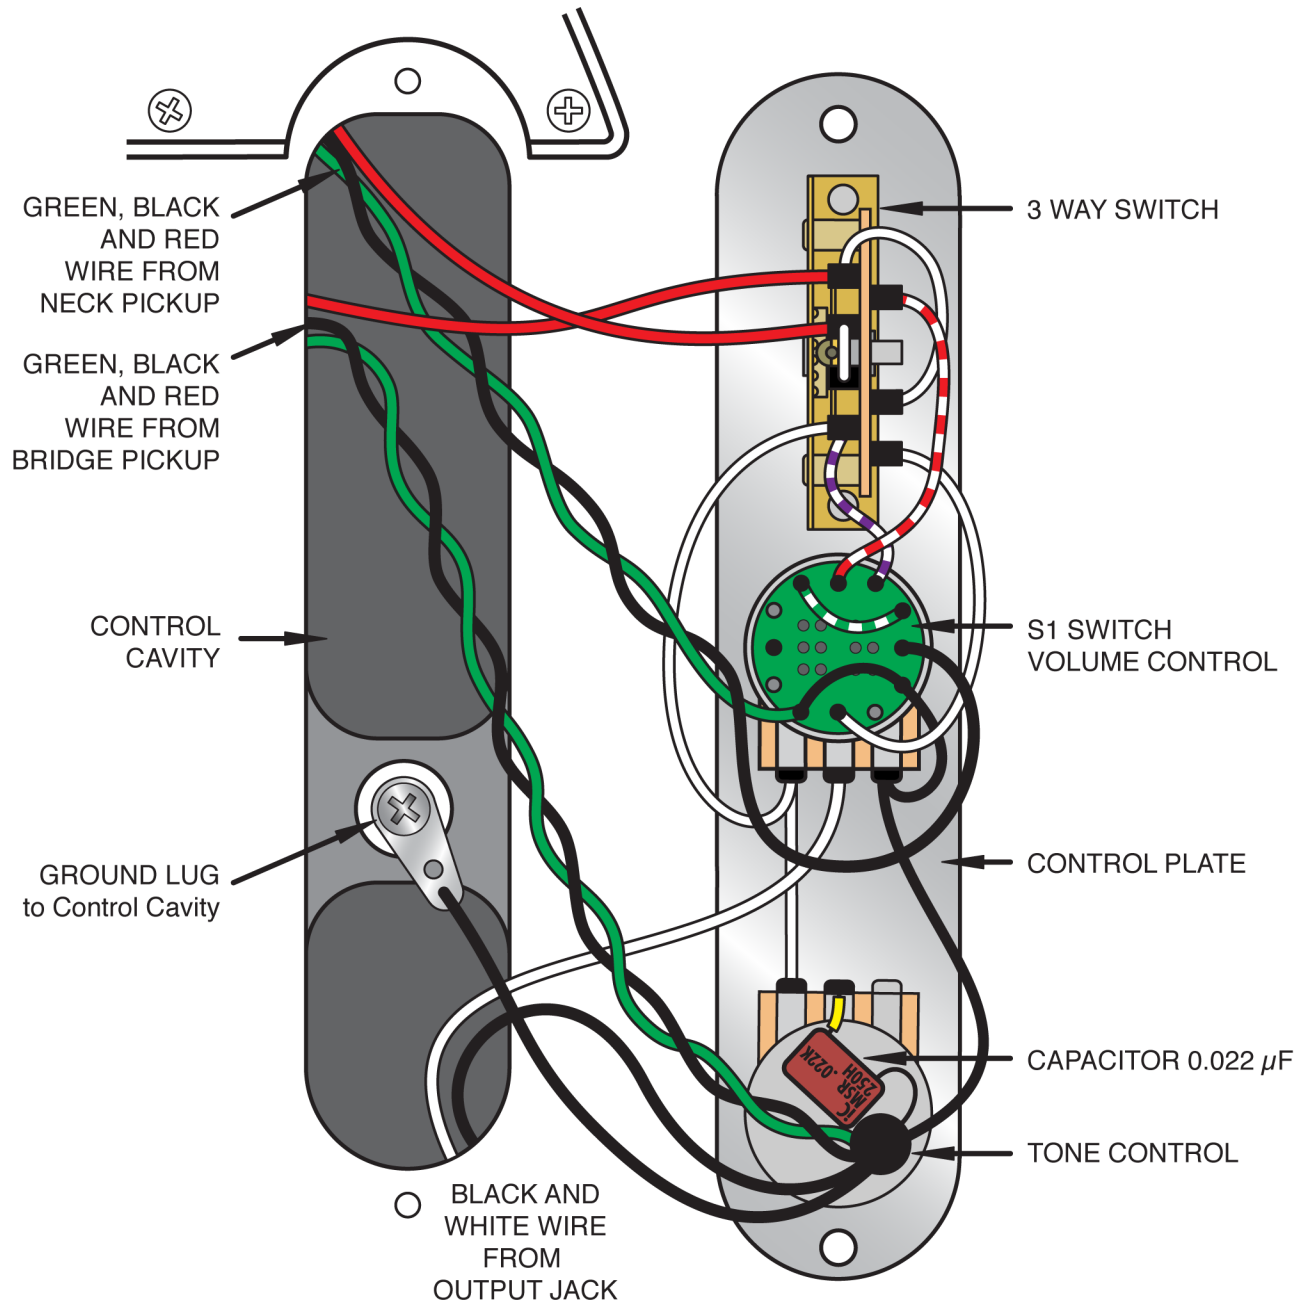

ALL SOLDER (BLACK DOTS IN DIAGRAM) MUST BE LEAD-FREE ROHS COMPLIANT.

SWITCH AND CONTROL FUNCTIONS

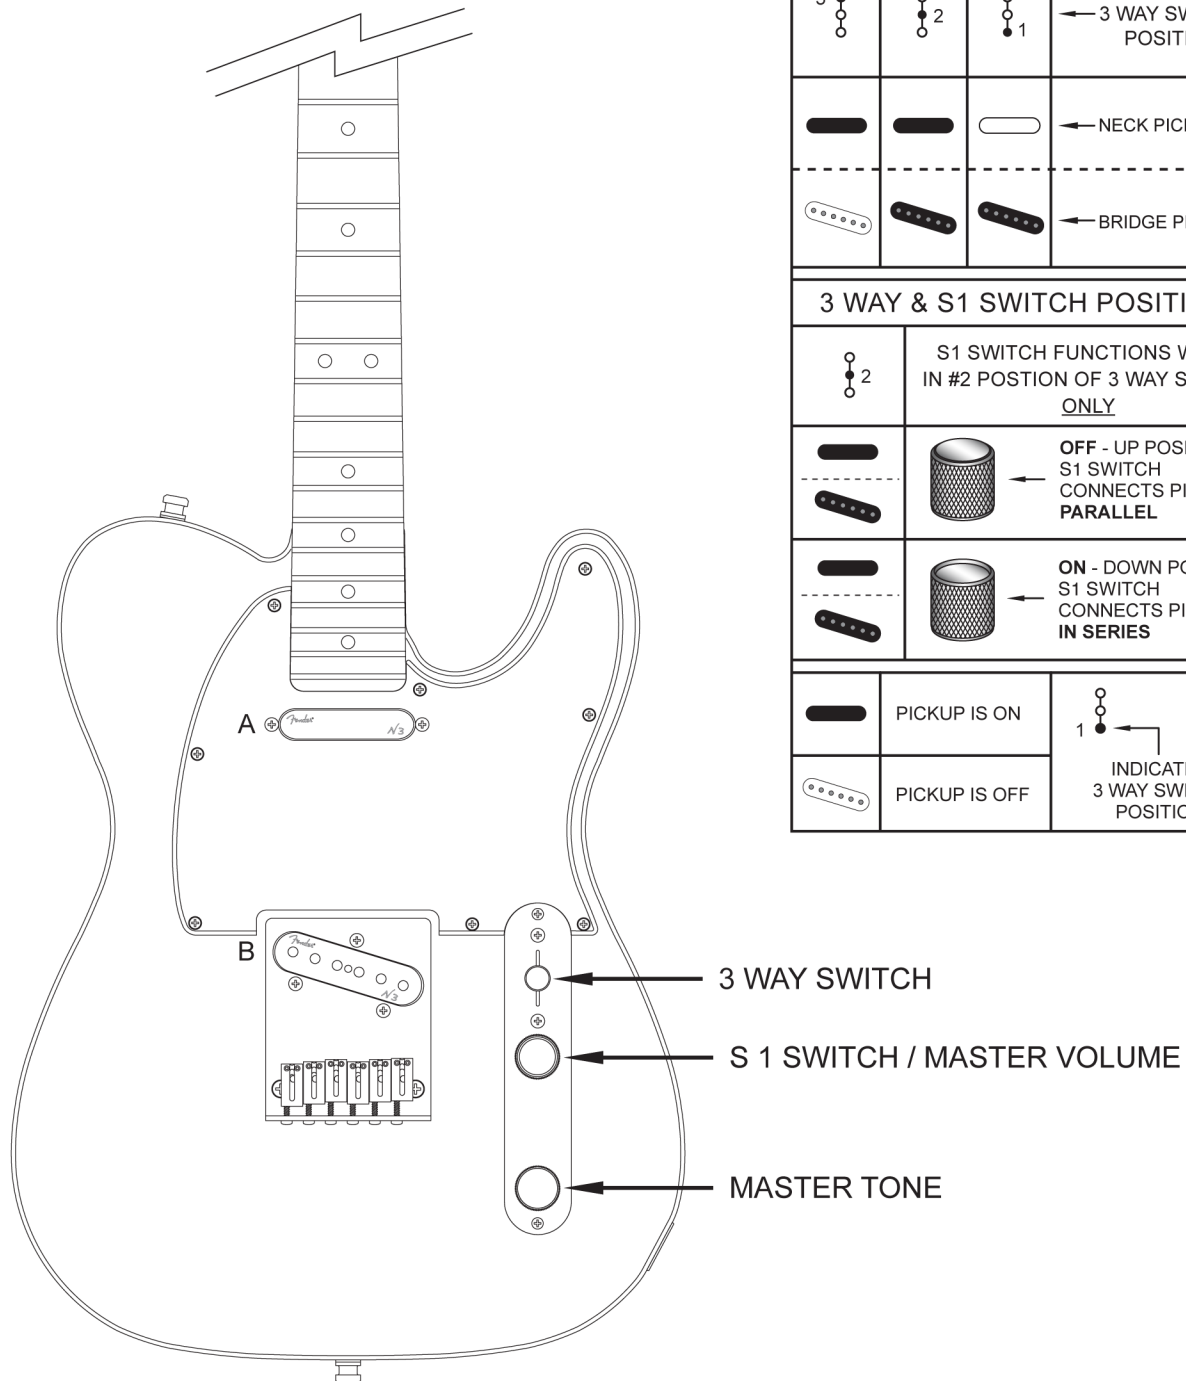

3 WAY SWITCH POSITIONS			
			← 3 WAY SWITCH POSITION
			← NECK PICKUP (A)
			← BRIDGE PICKUP (B)
3 WAY & S1 SWITCH POSITIONS			
	S1 SWITCH FUNCTIONS WORK IN #2 POSTION OF 3 WAY SWITCH <u>ONLY</u>		
		OFF - UP POSITION - S1 SWITCH CONNECTS PICKUPS PARALLEL	
		ON - DOWN POSITION - S1 SWITCH CONNECTS PICKUPS IN SERIES	
	PICKUP IS ON	 INDICATES 3 WAY SWITCH POSITION	
	PICKUP IS OFF		